


Low Profile Deck 10000 mm, with Extension Coupling

300 t

Datasheet:

- Flat box-type design from high-tensile steel StE 690
- Through steel flooring on the whole loading area
- In front and at rear coupling heads for modular bogies
- Hydraulic, brake and electric lines installed within the frame, with couplings
- 2 pairs lashing rings LC 30000 daN on the coupling heads
2 pairs bushings for screw-in lashing rings LC 20000 daN laterally of the coupling heads
10 pairs bushings for screw-in lashing rings LC 20000 daN laterally in the outer frame
10 pairs bushings for screw-in lashing rings LC 20000 daN on top of the outer frame including 4 units screw-in lashing rings LC 20000 daN
- Deadweight approx. 22700 kg

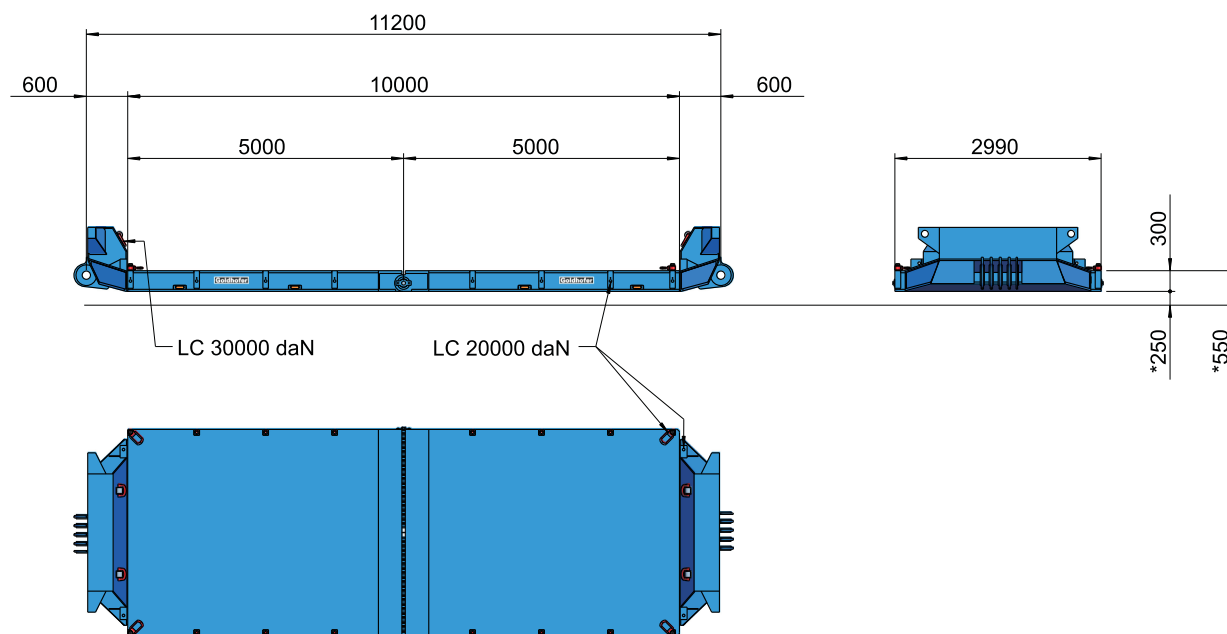

Options

Extension 2000 mm	4800 kg
Extension 3000 mm	6600 kg
Extension 4000 mm	8300 kg
Extension 5000 mm	10000 kg

Payload	362 t	299 t	253 t
In trailer combination	5+5	6+6	7+7
Payload	249 t	238 t	213 t
In semitrailer combination	4+6	5+7	6+8

Remark: The given payloads are solely technical values.
They do not form a statement on legally permissible payloads.
Illustration similar, drawing not to scale.